


**RoHS
Compliant**



Features:

- High Quality Open Style Toroidal Transformer
- Single Primary/ Dual Secondary windings
- Very low level radiated magnetic field
- Supplied with mounting Kit

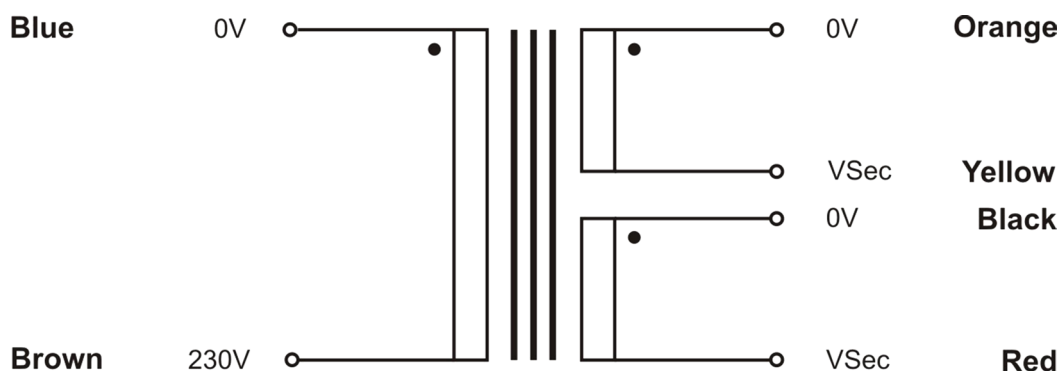

Lead Length: 150mm stripped and tinned ends

Part Number Table

Description	VA Rating	Input Voltage (V AC)	Output Voltage (V AC)	Output Current (A)	Regulation (Typ. %)	Temp Rise (°C)	Height × Dia. (mm)	Weight (Kg)	Part No
Transformer, 15VA, 2 × 6V	15	230	2 × 6	1.25	16	26	28 × 60	0.3	VTX-146-015-106
Transformer, 15VA, 2 × 9V	15	230	2 × 9	0.83	16	26	28 × 60	0.3	VTX-146-015-109
Transformer, 15VA, 2 × 12V	15	230	2 × 12	0.63	16	26	28 × 60	0.3	VTX-146-015-112
Transformer, 15VA, 2 × 15V	15	230	2 × 15	0.5	16	26	28 × 60	0.3	VTX-146-015-115
Transformer, 15VA, 2 × 18V	15	230	2 × 18	0.42	16	26	28 × 60	0.3	VTX-146-015-118
Transformer, 30VA, 2 × 9V	30	230	2 × 9	1.67	14	40	31 × 74	0.48	VTX-146-030-109

Transformer



Description	VA Rating	Input Voltage (V AC)	Output Voltage (V AC)	Output Current (A)	Regulation (Typ. %)	Temp Rise (°C)	Height × Dia. (mm)	Weight (Kg)	Part No
Transformer, 30VA, 2 × 12V	30	230	2 × 12	1.25	14	40	31 × 74	0.48	VTX-146-030-112
Transformer, 30VA, 2 × 15V	30	230	2 × 15	1	14	40	31 × 74	0.48	VTX-146-030-115
Transformer, 30VA, 2 × 18V	30	230	2 × 18	0.83	14	40	31 × 74	0.48	VTX-146-030-118
Transformer, 30VA, 2 × 25V	30	230	2 × 25	0.6	14	40	31 × 74	0.48	VTX-146-030-125
Transformer, 50VA, 2 × 6V	50	230	2 × 6	4.17	14	42	34 × 81	0.6	VTX-146-050-106
Transformer, 50VA, 2 × 9V	50	230	2 × 9	2.78	14	42	34 × 81	0.6	VTX-146-050-109
Transformer, 50VA, 2 × 12V	50	230	2 × 12	2.08	14	42	34 × 81	0.6	VTX-146-050-112
Transformer, 50VA, 2 × 15V	50	230	2 × 15	1.67	14	42	34 × 81	0.6	VTX-146-050-115
Transformer, 50VA, 2 × 18V	50	230	2 × 18	1.39	14	42	34 × 81	0.6	VTX-146-050-118
Transformer, 50VA, 2 × 25V	50	230	2 × 25	1	14	42	34 × 81	0.6	VTX-146-050-125
Transformer, 50VA, 2 × 55V	50	230	2 × 55	0.45	14	42	34 × 81	0.6	VTX-146-050-155
Transformer, 80VA, 2 × 9V	80	230	2 × 9	4.44	11	50	40 × 90	1	VTX-146-080-109
Transformer, 80VA, 2 × 12V	80	230	2 × 12	3.33	11	50	40 × 90	1	VTX-146-080-112
Transformer, 80VA, 2 × 15V	80	230	2 × 15	2.67	11	50	40 × 90	1	VTX-146-080-115
Transformer, Toroidal, 2 × 18V, 80VA	80	230	2 × 18	2.22	11	50	40 × 90	1	VTX-146-080-118
Transformer, 80VA, 2 × 25V	80	230	2 × 25	1.6	11	50	40 × 90	1	VTX-146-080-125
Transformer, 80VA, 2 × 55V	80	230	2 × 55	0.73	11	50	40 × 90	1	VTX-146-080-155
Transformer, 120VA, 2 × 12V	120	230	2 × 12	5	10	55	44 × 98	1.32	VTX-146-120-112
Transformer, 120VA, 2 × 15V	120	230	2 × 15	4	10	55	44 × 98	1.32	VTX-146-120-115
Transformer, 120VA, 2 × 18V	120	230	2 × 18	3.33	10	55	44 × 98	1.32	VTX-146-120-118
Transformer, 120VA, 2 × 25V	120	230	2 × 25	2.4	10	55	44 × 98	1.32	VTX-146-120-125
Transformer, 120VA, 2 × 55V	120	230	2 × 55	1.09	10	55	44 × 98	1.32	VTX-146-120-155
Transformer, 160VA, 2 × 12V	160	230	2 × 12	6.67	8	55	46 × 105	1.6	VTX-146-160-112
Transformer, 160VA, 2 × 15V	160	230	2 × 15	5.33	8	55	46 × 105	1.6	VTX-146-160-115
Transformer, 160VA, 2 × 18V	160	230	2 × 18	4.44	8	55	46 × 105	1.6	VTX-146-160-118
Transformer, 160VA, 2 × 25V	160	230	2 × 25	3.2	8	55	46 × 105	1.6	VTX-146-160-125
Transformer, 160VA, 2 × 30V	160	230	2 × 30	2.67	8	55	46 × 105	1.6	VTX-146-160-130
Transformer, 160VA, 2 × 55V	160	230	2 × 55	1.45	8	55	46 × 105	1.6	VTX-146-160-155
Transformer, 225VA, 2 × 12V	225	230	2 × 12	9.38	7	60	50 × 110	2.2	VTX-146-225-112
Transformer, 225VA, 2 × 15V	225	230	2 × 15	7.5	7	60	50 × 110	2.2	VTX-146-225-115
Transformer, 225VA, 2 × 18V	225	230	2 × 18	6.3	7	60	50 × 110	2.2	VTX-146-225-118
Transformer, 225VA, 2 × 25V	225	230	2 × 25	4.5	7	60	50 × 110	2.2	VTX-146-225-125
Transformer, 225VA, 2 × 30V	225	230	2 × 30	3.75	7	60	50 × 110	2.2	VTX-146-225-130
Transformer, 225VA, 2 × 55V	225	230	2 × 55	2.05	7	60	50 × 110	2.2	VTX-146-225-155
Transformer, 300VA, 2 × 25V	300	230	2 × 25	6	6	60	54 × 125	2.8	VTX-146-300-125
Transformer, 300VA, 2 × 30V	300	230	2 × 30	5	6	60	54 × 125	2.8	VTX-146-300-130
Transformer, 300VA, 2 × 35V	300	230	2 × 35	4.28	6	60	54 × 125	2.8	VTX-146-300-135
Transformer, 300VA, 2 × 55V	300	230	2 × 55	2.73	6	60	54 × 125	2.8	VTX-146-300-155

www.element14.com
www.farnell.com
www.newark.com



Transformer



Description	VA Rating	Input Voltage (V AC)	Output Voltage (V AC)	Output Current (A)	Regulation (Typ. %)	Temp Rise (°C)	Height × Dia. (mm)	Weight (Kg)	Part No
Transformer, 500VA, 2 × 25V	500	230	2 × 25	10	6	68	59 × 135	4.3	VTX-146-500-125
Transformer, 500VA, 2 × 30V	500	230	2 × 30	8.33	6	68	59 × 135	4.3	VTX-146-500-130
Transformer, 500VA, 2 × 35V	500	230	2 × 35	7.14	6	68	59 × 135	4.3	VTX-146-500-135
Transformer, 500VA, 2 × 40V	500	230	2 × 40	6.25	6	68	59 × 135	4.3	VTX-146-500-140
Transformer, 500VA, 2 × 45V	500	230	2 × 45	5.56	6	68	59 × 135	4.3	VTX-146-500-145
Transformer, 500VA, 2 × 50V	500	230	2 × 50	5	6	68	59 × 135	4.3	VTX-146-500-150
Transformer, 500VA, 2 × 55V	500	230	2 × 55	4.55	6	68	59 × 135	4.3	VTX-146-500-155
Transformer, 625VA, 2 × 45V	625	230	2 × 45	6.95	5	70	71 × 139	5.2	VTX-146-625-145
Transformer, 625VA, 2 × 55V	625	230	2 × 55	5.68	5	70	71 × 139	5.2	VTX-146-625-155
Transformer, 800VA, 2 × 40V	800	230	2 × 40	10	5	72	65 × 163	6.3	VTX-146-800-140
Transformer, 800VA, 2 × 50V	800	230	2 × 50	8	5	72	65 × 163	6.3	VTX-146-800-150
Transformer, 800VA, 2 × 55V	800	230	2 × 55	7.27	5	72	65 × 163	6.3	VTX-146-800-155
Transformer, 1000VA, 2 × 40V	1000	230	2 × 40	12.5	4	75	71 × 167	7.5	VTX-146-1000-140
Transformer, 1000VA, 2 × 45V	1000	230	2 × 45	11.11	4	75	71 × 167	7.5	VTX-146-1000-145
Transformer, 1000VA, 2 × 50V	1000	230	2 × 50	10	4	75	71 × 167	7.5	VTX-146-1000-150
Transformer, 1000VA, 2 × 55V	1000	230	2 × 55	9.09	4	75	71 × 167	7.5	VTX-146-1000-155

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.